

Select Color Collection

MILL STEEL FEATURES

The next generation silicone-polyester Cool Chemistry® system is here! These coatings are not only engineered to give a 40-year film integrity warranty, but also offer high reflectivity in medium and dark colors to such a degree that they help dramatically reduce the energy (and the associated costs) used for cooling, especially in hot, sunny climates.

This premium silicone-polyester system provides the next best exterior durability to 70% PVDF coatings based on real world exposure testing in South Florida plus energy savings in a full spectrum of colors. The use of proprietary resin technology and inorganic and ceramic pigments provides a coating system that outperforms other silicone-polyester coatings for chalking and fade resistance with a 30-year performance warranty.

In addition to their remarkable “cool” technology, these coatings clean easily, have excellent stain resistance, scratch resistance, and are recoatable. Coupled with a high performance primer, this system affords salt spray and moisture resistance unexcelled in the industry. In addition to offering easier conversion from existing systems, the system’s excellent application properties allow coaters to run at their highest possible line speeds.

Silicone-polyester coatings are ideal for all metal building applications requiring a high performance coating system for metal roofing and walls, including commercial, industrial, agricultural and residential markets.

*Energy Star approved for steep slope applications.

TSR = Total Solar Reflectance

Due to variations in computer monitors, we cannot guarantee the accuracy of colors presented on-screen with actual products. Please refer to a color card or paint swatches to ensure color accuracy.. Actual color chips available upon request.



MILL STEEL COMPANY BUILDING PRODUCTS

100 Finley Ave. West, Birmingham, AL 35204 • Phone: (205) 251-8800 • Toll-free: (877) 262-8333
Website: www.millsteel.com



AkzoNobel
Tomorrow's Answers Today

LIFETITE METAL PRODUCTS

427 Kentuck Rd., Kenna, WV 25248 • Phone: (304) 786-8012

131 Industrial Park Extension, Belington, WV 26250
Phone: (304) 823-3771 • Website: www.lifetite.com



*Burgundy TSR = .26



*Barn Red TSR = .35




*Bright Red TSR = .42



*Dark Red TSR = .35



*Regal Blue TSR = .26

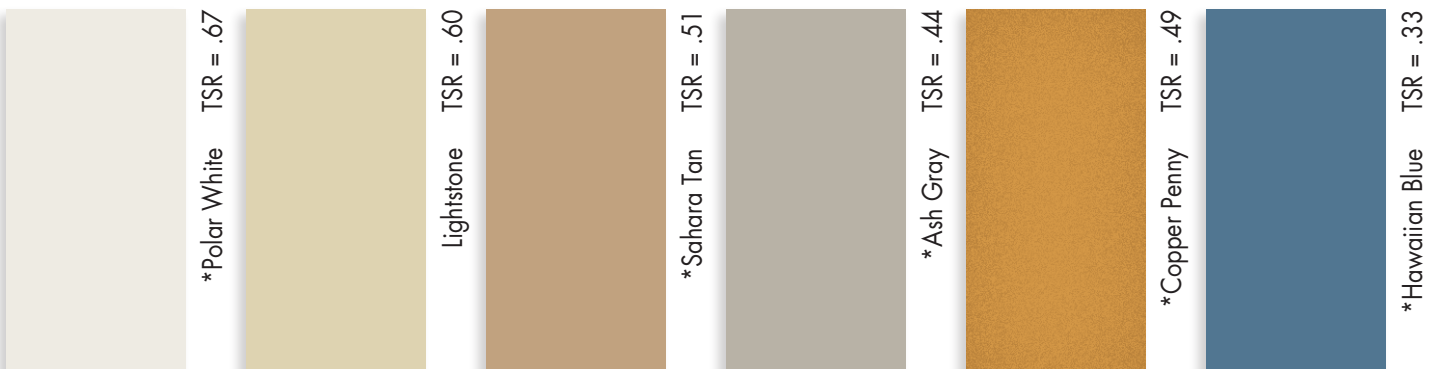

Film Properties		Test Methods & Descriptions	CERAM-A-STAR®1050	
SUBSTRATE			Hot Dipped Galvanized Galfan & Galvalume®	Aluminum
Dry Film Thickness:		ASTM ¹ D1400, D1005, D4138 (NCCA ² II-13,14,15)	0.20 - 0.25 Mils Primer 0.70 - 0.90 Mils Topcoat	0.20 - 0.25 Mils Primer 0.70 - 0.90 Mils Topcoat
PHYSICAL PROPERTIES				
60° Specular Gloss:		ASTM D523	35%	35%
Pencil Hardness:		ASTM D3363 (NCCA II - 12) Eagle Turquoise Pencil	"F" - Minimum	"F" - Minimum
Flexibility:	T-Bend Mandrel Bend	NCCA II - 9 ASTM D522 180° bend around 1/8" mandrel	2T - No Tape-Off No Tape-Off	2T - No Tape-Off No Tape-Off
Adhesion:		ASTM D3359 (NCCA II - 5) Reverse Impact Cross Hatch	No Adhesion Loss	No Adhesion Loss
Reverse Impact:		ASTM D2794 (NCCA II - 6) 80 inch-pound impact with a 5/8" steel ball or = 2000 x decimal steel thickness in inches	No Adhesion Loss	No Adhesion Loss
ABUSE TOLERANCE				
Abrasion Resistance:	Falling Sand Transit	ASTM D968, Liters to expose 5/32" area of substrate Based on topside to backer contact in transit after painting	30 Liters Per Mil of Film Acceptable	30 Liters Per Mil of Film Acceptable
Mortar Resistance:		AAMA ⁸ 605.2 (24 Hour Pat Test)	No Effect	No Effect
Detergent Resistance:		ASTM D2248 3% @ 100°F, 72 Hours	No Effect	No Effect
RESISTANCE TO CORROSION, CHEMICALS & POLLUTION				
Acid Pollutants:		Per ASTM D1308, Proc.6.2:		
	10% Muriatic Acid	24 Hours	No Effect	No Effect
	20% Sulfuric Acid	24 Hours	No Effect	No Effect
	70% Nitric Acid Vapors	AAMA 605.2, ASTM G87 (30 Minutes)	<5 dE Color Change ⁶	<5 dE Color Change ⁶
	Kesternich Test	SO ₂ Cyclic Test, 2 Liters	10 cycles ⁵	10 cycles ⁵
Alkali Resistance:				
	Sodium Hydroxide	ASTM D1308 10%, 25% (1 Hour)	Minimal Effect	Minimal Effect
Salt Fog:		ASTM B117 5% Salt Fog @ 95°F	1000 Hours ⁴	3000 Hours ⁴
Humidity:		ASTM D2247 100% Relative Humidity @ 100°F	1500 Hours ⁷	1500 Hours ⁷
WEATHERING PROPERTIES				
Accelerated Weathering:		ASTM D822, G152, G153 Weatherometer	2000 Hours	2000 Hours
		ASTM D2244 Color	<5 dE Color Change ⁶	<5 dE Color Change ⁶
		ASTM D4214 Chalk	Maximum #8	Maximum #8
EMMAQUA Testing:		Per ASTM D4141	Superior Results	Superior Results
Exterior Weathering:			Superior: Maximum	Superior: Maximum
	Florida Exposure	ASTM D2244 Color	<5 dE Color Change ⁶	<5 dE Color Change ⁶
	10 Years @ 45° South	ASTM D659 Chalk	Maximum #8	Maximum #8
	Film Erosion	AAMA 605.2	Less than 20% film loss	Less than 20% film loss

1 American Society Testing and Materials.

2 National Coil Coaters Association.

3 Higher and lower glosses available upon request.

4 Less than 1/8" creep from scribe. No more than few #8 blisters.

5 No objectionable color change.

6 Hunter d (delta) E color difference units.

7 No more than few #8 blisters.

8 American Architectural Manufacturers Association.

• CERAM-A-STAR® 1050 is a trademark of Akzo Nobel Coatings, Inc.

MILL STEEL COMPANY BUILDING PRODUCTS

100 Finley Ave. West, Birmingham, AL 35204

Phone: (205) 251-8800 • Toll-free: (877) 262-8333

Website: www.millsteel.com



AkzoNobel

Tomorrow's Answers Today